



MÁRMOL NAHUAN BEIGE

PRODUCTO

PRODUCT

Mármol Nahuan Beige

TIPO DE PIEDRA

STONE TYPE

Metamórfica

CARACTERÍSTICAS

TÉCNICAS

CHARACTERISTICS



SLIGHT
COLOR
VARIATION



MATT



RMP
CLASSIFICATION



RMP

- Peso específico: 2710 – 2730 Kg/m³
- Coeficiente de absorción: 0,06-0,08%
- Resistencia a la compresión: 1740 – 1760 Kg/cm²
- Resistencia a la flexión: 154 – 156 Kg/cm²
- Alteración térmica: 0,0018 mm/m °C

ACABADOS

SUPERFICIE

SURFACE FINISHES

- Natural/Saw Cut
- Pulido Mate / Honed
- Pulido Brillante/ Polish
- Cepillado /Brushed
- Anticado/Acid Wash

CANTOS

EDGES

- Recto/Cut
- Tomboleado/ Tumble
- Casqueado /Chiselledge

FORMATOS

FORMATS

4"x4", 12"x24", 16"x16", 18"x18",

24"x24". Espesores de 1 a 2 cm

FORMATOS Y PIEZAS ESPECIALES SOBRE PEDIDO

TILES OR SPECIAL SIZES MAY BE AVAILABLE UPON REQUEST

USOS

USES



INDOOR
FLOORING



INDOOR
WALL
COVERING



OUTDOOR
FLOORING



OUTDOOR
WALL
COVERING



SHOWER
WALL
COVERING



SHOWER
FLOORING



POOL
SURROUNDINGS

EMBALAJE


PACKING

Pallets de madera inmunizada de cultivo industrial.
Immunized Crates From Industrial Production



ORIGEN
AMERICA

Maragro

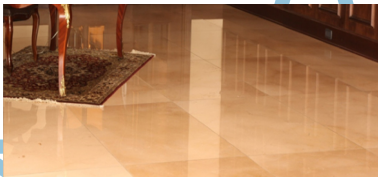

Pulido Brillante
Polished

Mármol Nahuan Beige



Pulido Mate
Honed

Cepillado
Brushed





Maragro★



(506) 8893 8888



info@maragro.com

maragro.com