

PALLADIUM

PRODUCTO

Palladium

PRODUCT

TIPO DE PIEDRA

Sedimentaria / Fossil Stone

STONE TYPE

CARACTERISTICAS

CHARACTERISTICS



SLIGHT
COLOR
VARIATION



MATT



RAMP
CLASSIFICATION



RAMP
CLASSIFICATION

- Coeficiente de absorción: 4.0%
- Resistencia a la compresión: Seco: 31,2 MPa / 4525 psi / Húmedo: 32,2 MPa / 4670 psi
- Resistencia a la flexión: Seco: 5,9 MPa / 860 psi - Húmedo: 4,5 MPa / 650 psi
- Alteración por choque térmico: no altera

ACABADOS

SUPERFICIE

SURFACE FINISHES

- Natural/Saw Cut
- Levigado / Honed
- Retapado & Pulido Mate / Filled & Honed
- Cepillado /Brushed
- Abujardado/Bush Hammered
- Escarchado / Frosted
- Split Face / Rough Face

CANTOS

EDGES

- Recto/Cut
- Tomboleado/ Tumble

FORMATOS

FORMATS

Retal, 8"x16", 6"x12", 12"x12", 12"x24", 16"x24", 16"x16", 16"x32", 18"x18", 24"x24", 24"x48", 36"x36". Espesor 2 cm

FORMATOS Y PIEZAS ESPECIALES SOBRE PEDIDO
TILES OR SPECIAL SIZES MAY BE AVAILABLE UPON REQUEST

USOS

USES



INDOOR FLOORING
INDOOR WALL COVERING
OUTDOOR FLOORING
OUTDOOR WALL COVERING
SHOWER WALL COVERINGS
SHOWER FLOORINGS
POOL SURROUNDINGS

EMBALAJE

PACKING

Pallets de madera inmunizada de cultivo industrial.
Immunized Crates From Industrial Production



ORIGEN
AMERICA

Maragro 

Palladium




Natural
Saw Cut



Retapado & Pulido Mate
Filled & Honed

Semiretapada
Filled

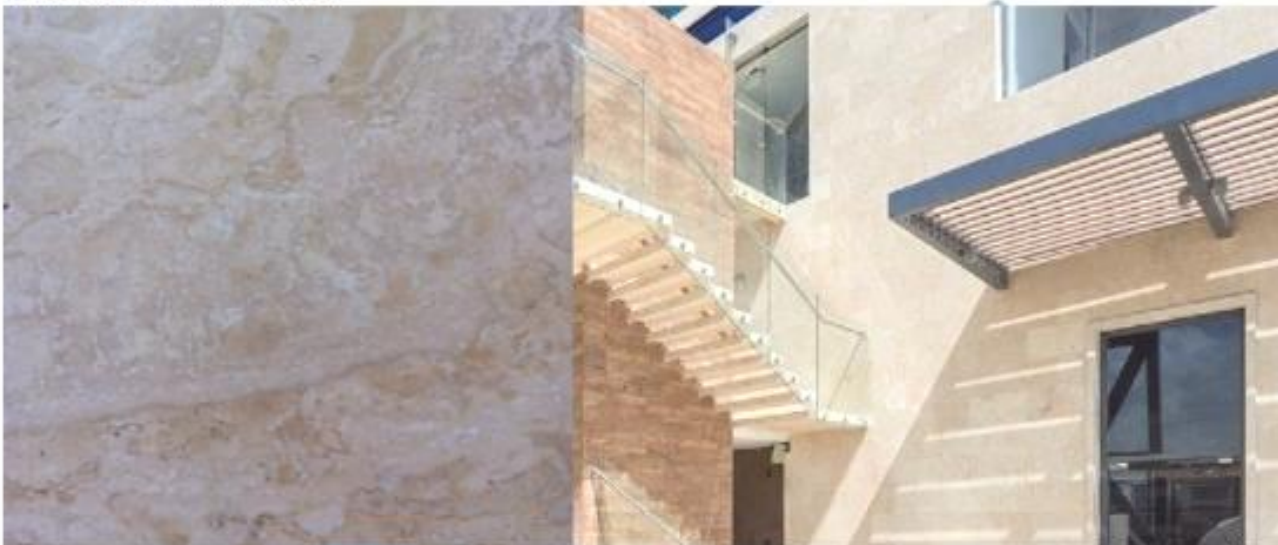



Maragro★



(506) 8893 8888



info@maragro.com

maragro.com